







Type	Manual	Manual Start (15) TEST
ECO	Monthly : 1 min Annually : Rated duration	
Type	Automatic Test	Manual Start (16) TEST
AT(Automatic Test)	Function test :Every 7 Days	
DALI (DALI)	Duration Test :Annually	


Green LED	Status
	System OK
	Duration Test
	Function Test
	Inhibit Mode (DALI models) (Switching into DALI Inhibit Mode via controller)
Red LED	Status
	Led Module Failure
	Battery disconnected
	Battery failure
Green Led and Red Led On	Status
	Battery operation (Emergency Mode) or after Rest Mode (DALI models)
	Address Identification Mode (DALI models)

Dimensions (mm)

Material : PC (Polycarbonate)
Color : White



Time Selection :

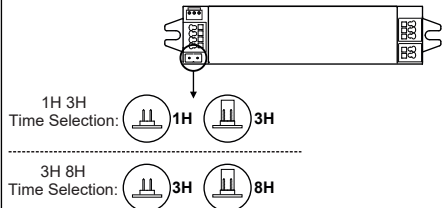

Acil Aydınlatma WALD NG MONTAJ KILAVUZU WALD NG Emergency Luminaire Recessed Mounted



Escape Route
Lighting Lens



Open Area (Antipanic)
Lighting Lens



220-240V 50/60Hz	NM	1H-3H 3H-8H	MAX 220 Lm	6500 K	t _a 0-45°C	LED SMD	IP30		2.5 mm²	Li-Fe PO4	
---------------------	----	----------------	---------------	-----------	--------------------------	------------	------	---	------------	--------------	---

ÖNEMLİ UYARI – ŞANTIYE ELEKTRİĞİ KULLANIMI

-Ürünlerimizi şantiye elektriginde (geçici enerji beslemeleri, jeneratör çıkışları veya dengesiz gerilim kaynakları) çalıştırmayınız.
-Ürünlerin sağlıklı çalışabilmesi için yalnızca güvenilir ve sabit gerilimli şehir şebekesi elektriginde (230V AC ±%10, 50Hz) devreye alınması gerekmektedir.

IMPORTANT NOTICE - USE OF SITE ELECTRICITY

Do not operate our products on site electricity (temporary power supplies, generator outputs or unstable voltage sources).
In order for the products to operate properly, they must only be switched on at reliable and constant voltage city mains electricity (230V AC ± 10%, 50Hz).

- Cihaz iki kere 48 saat şarj ve deşarj olması gereklidir. Üçüncü 48 saat şarj sonucunda 3 saat çalışacaktır.
- The device must be charged and discharged twice for 48 hours. It will work for 3 hours after the third 48 hours of charging.
- Il dispositivo deve essere caricato e scaricato due volte per 48 ore. Funzionerà per 3 ore dopo le terze 48 ore di ricarica.

