


In order for the products to operate properly, they must only be switched on at reliable and constant voltage city mains electricity (230V AC $\pm$ 10%, 50Hz).

EXIT TORSECA


MONTAJ KILAVUZU

Şekil 1 : Bağlantılar


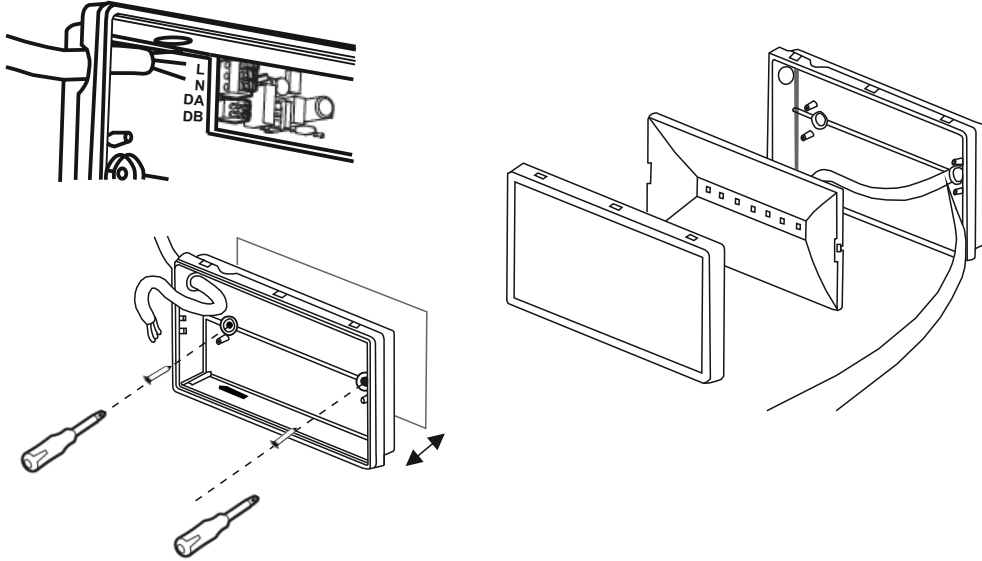


Şekil 2 : Aparatlara göre montaj

Bayrak Aparatı / Flag mounting
342x110x96mm, 280gr.





Çelik Tel Askı / Steel wire hanger
1000mm, 130gr.




EXIT TORSECA

MONTAJ KILAVUZU



Sarkıt pleksi, Plexiglass for pendant sign
266x160x5mm, 480gr.

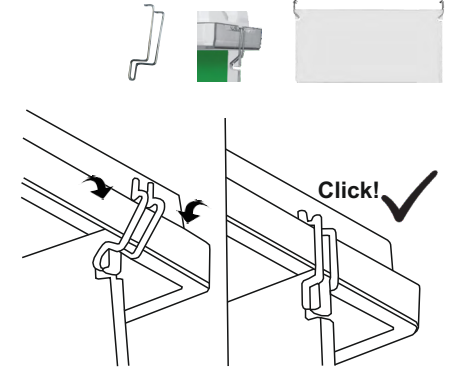

Kablo tavaşı montaj parçası, Mounting bracket for cable tray
170x40mm, 280gr.

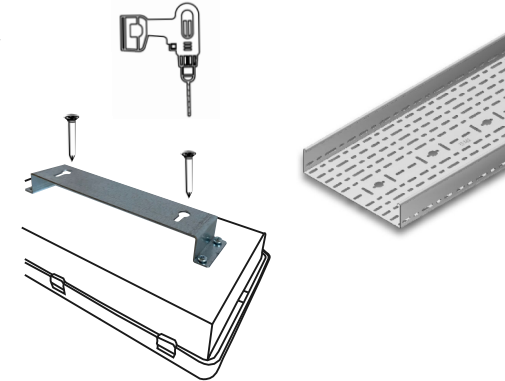

Asma tavana için yay, Spring for recessed mounting
70x20mm, 80gr.

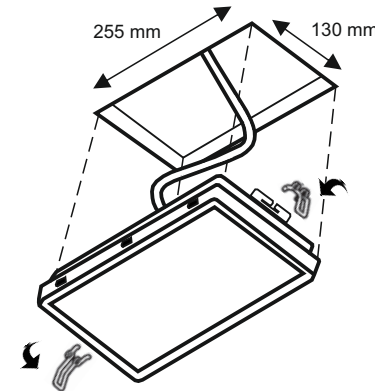

ışık mühendisliği