PIRAMIT

Recessed Mounted 20x20cm 11 W LED Luminaire

Order Code	: 3059006
Product Code	: PIR 011A 40OD00 0K8202020

Product Data

Standard Features

Housing	: 0,60mm RAL9003 Powder finished sheet steel
Diffuser	: Opal PMMA
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED

Optical & Electrical Features

Power Consumption	: 10.2 W
Final Luminous Flux	: 842.8 lm
Efficacy	: 82.1 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 0.5 kV
Drive Current	: 350 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+40 °C
Impact Resistance	: IK 02
Led Life Time - L70	: > 52.000 hours @Ta= 40 °C

Photometric Curve

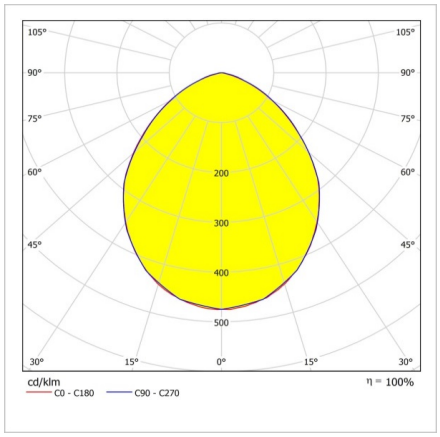

Optional Features

Ceiling Types	: Rock-wool, Surface mounted
Correlated Color Temperatures	: 3000K, 5700K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

* KAM: Corridor Lighting Module

PIRAMIT

Recessed Mounted 20x20cm 11 W LED Luminaire

3059006 PIR 011A 40OD00 0K8202020



Dimensions (mm)

	a	b	h	d^1, d^2
Plasterboard	195	195	66,5	180x180
Rock-wool	195	195	66,5	-
Surface mounted	240	240	82	-

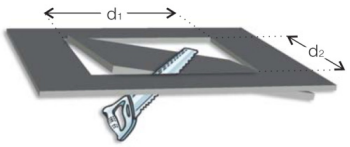

Weight (kg)

Standard	0,5
With Emergency Kit (1 hr.)	0,9
With Emergency Kit (3 hrs.)	1,4

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revizyon tarihi: 14.08.2018