COOLED

Recessed Mounted 21 W Spot LED Luminaire

Order Code	: 3058486
Product Code	: HYP 020A 40OA00 1K7 06 20

Product Data

Standard Features

Housing	: RAL 9006 painted, aluminium enjection housing
Diffuser	: White reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: COB LED

Optical & Electrical Features

Power Consumption	: 20.8 W
Final Luminous Flux	: 1746 lm
Efficacy	: 83.8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 0.5 kV
Drive Current	: 700 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Photometric Curve

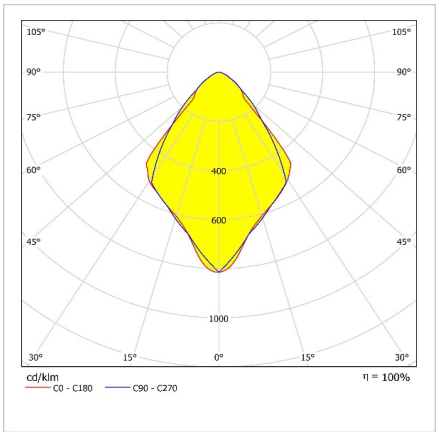

Other Features & Conditions

Operating Temperature Range	: -20 °C/+35 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 57.500 hours @Ta= 35 °C

Optional Features

Correlated Color Temperatures	: 3000K
Emergency Kit Options	: 1, 3 hours
DALI Option	: No

COOLED

Recessed Mounted 21 W Spot LED Luminaire

3058486 HYP 020A 40OA00 1K7 06 20

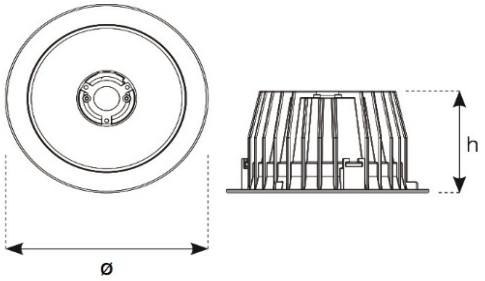

Dimensions (mm)

	ø	h	ø D
Standard	178	92	160
With Emergency Kit (1 hr.)	178	92	160
With Emergency Kit (3 hrs.)	178	92	160



Weight (kg)

Standard	0.8
With Emergency Kit (1 hr.)	2
With Emergency Kit (3 hrs.)	2,3

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 14.08.2018