GLORY V.2 CH

Recessed Mounted 8 W Spot Led Luminaire

Order Code	: 3118422
Product Code	: DWL 008A 40CH00 727 04 40 GLO V.2

Product Data

Standard Features

Housing	: RAL 9016 Painted aluminium injection housing
Diffuser	: Surfaced milky diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP 40
Installation	: Recessed mounted
Light Source	: Mid Power LED

Optical & Electrical Features

Power Consumption	: 7.9 W
Final Luminous Flux	: 727.7 lm
Efficacy	: 91.7 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 350 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK 02
Led Life Time - L70	: 60.000 hours @ Ta= 40 °C

Photometric Curve

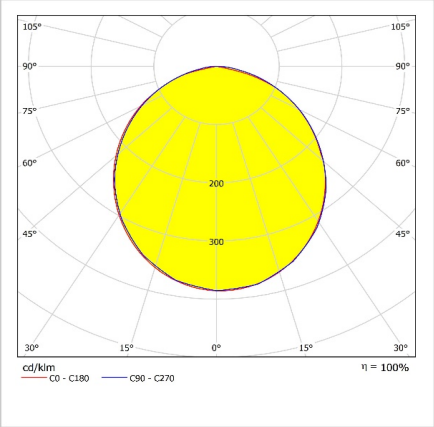

Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
IP Grade	: IP65
KAM Option	: Yes
Color Option	: RAL 9005, 9010, 9016

* KAM: Corridor Lighting Module

GLORY V.2 CH

Recessed Mounted 8 W Spot Led Luminaire

3118422 DWL 008A 40CH00 727 04 40 GLO V.2

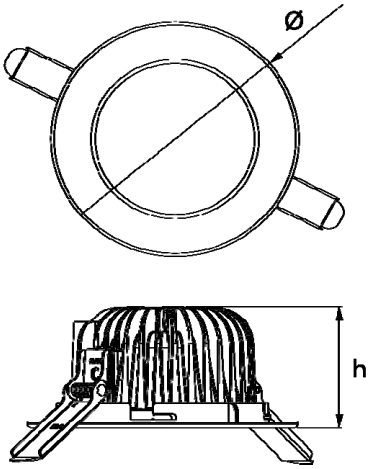

Dimensions (mm)

	Ø	h	Ø D
Recessed mounted	115	68	105



Weight (gr)

Standard	410
With Emergency Kit (1 hr.)	910
With Emergency Kit (3 hrs.)	1110

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 21.09.2017