

STL MİKRO

30 W Sıva Üstü Tekli Modül Lineer LED Armatür

Sipariş Kodu : 3103291
Ürün Kodu : STL 030U 40OD28 2K3 175TK3I LN6XMC



Ürün Bilgisi

Standart Ürün Özellikleri

Housing	: RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP40
Installation	: Recessed mounted
Light Source	: Mid Power LED

Optical & Electrical Features


Power Consumption	: 29.9 W
Final Luminous Flux	: 2327.7 lm
Efficacy	: 77.6 lm/W
Input Voltage	: 220-240 24V DC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

*Teknik değerlerde \pm %10 tolerans vardır.

Diğer Özellikler

Çalışma Sıcaklık Aralığı	: -25 °C/+40 °C
Darbe Dayanım Sınıfı (IK)	: IK02
Led Ömrü - L70	: > 72.000 saat @Ta= 40 °C

Fotometrik Eğri

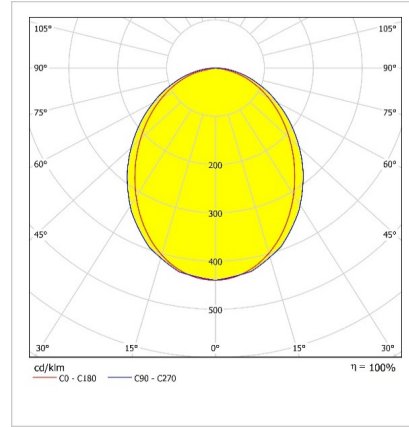

Opsiyonel Özellikler

Renk Sıcaklığı	: 2700K, 3000K
Renk Seçeneği	: RAL 9005



STL MİKRO

30 W Sıva Üstü Tekli Modül Lineer LED Armatür

3103291 STL 030U 40OD28 2K3 175TK3I LN6XMC

Uzunluk Ölçüleri (mm)

	a	b	h
Tekli Modül	1761	40	40
Başlangıç Modülü	1756	40	40
Sonlandırma Modülü	1756	40	40
Ara boy Modülü	1755	40	40



Ağırlık (kg)

Standart	3,4
----------	-----

- EAE, gerekli gördüğü uygun değişiklikleri önceden bildirmeden yapma hakkına haizdir.



Revizyon tarihi: 10.02.2020