STL DOMINO

51 W Surface Mounted Single Module
Lineer LED Luminaire

Order Code	: 3118329
Product Code	: STL 051U 40OD00 6K6 200TK3I LN8XDM 60

Product Data

Standard Features

Housing	: RAL 7047 Powder finished aluminium extrusion housing and aluminium injection cover
Diffuser	: 60° high efficiency reflector
IP Grade	: IP20
Installation	: Surface mounted, pendant
Light Source	: Power LED

Optical & Electrical Features

Power Consumption	: 50.7 W
Final Luminous Flux	: 6662.3 lm
Efficacy	: 131.2 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 280 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >70

Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 60.000 hours @Ta= 40 °C

Photometric Curve

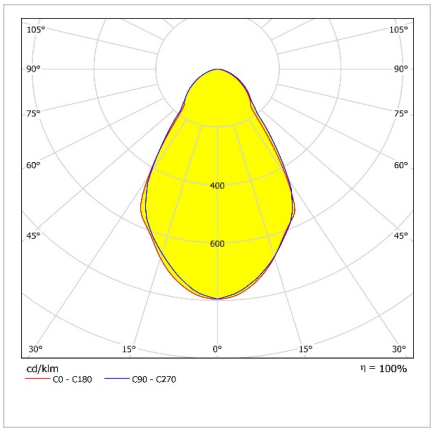

Optional Features

Correlated Color Temperatures	: 2700K, 3000K
Emergency Kit Options	: No
DALI Option	: No
Color Option	: RAL 9005
Angle Options	: 20° , 45°

STL DOMINO

51 W Suface Mounted Single Module Lineer LED Luminaire

3118329 STL 051U 40OD00 6K6 200TK3I LN8XDM 60

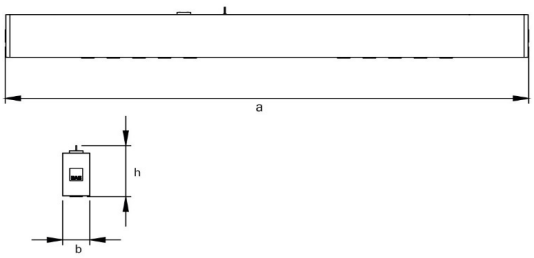

Dimensions (mm)

	a	b	h
Single Module	2020.5	53	88.7

Weight (kg)

Standard	5,3

- EAE, reserves the right to make changes without prior notice.

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90
www.eaeaydinlatma.com.tr

engineering the light

Revision date: 13.12.2017