



LINA ETANJ V.3

Surface Mounted 19 W Etanj LED Luminaire

Order Code : 3107076
 Product Code : LNE 020U 40OD00 2K1 053 ST V.3



Product Data

Standard Features

Housing	: Aluminium extrusion housing
Diffuser	: Glare controlled opal diffuser
IP Grade	: IP65
Installation	: Surface mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 18,9 W
Final Luminous Flux	: 2191 lm
Efficacy	: 115,6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 700mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK09
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

Photometric Curve

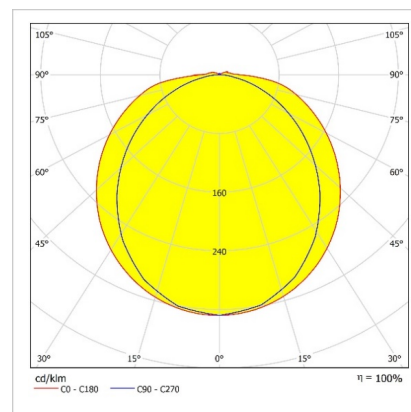


Optional Features

Correlated Color Temperatures	: 3000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Sensor	: Yes

LINA ETANJ V.3

Surface Mounted 19 W Etanj LED Luminaire

3107076 LNE 020U 40OD00 2K1 053 ST V.3

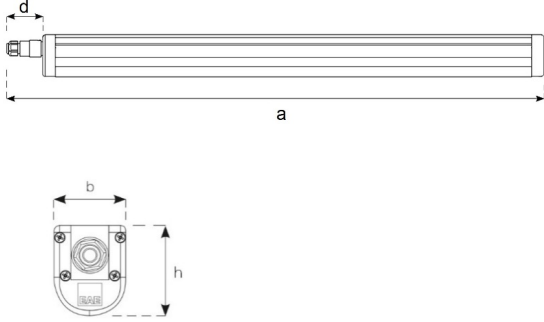

Dimension (mm)


	a	b	h	d
Standard	600	65	83	70
With Emergency Kit (1 hr.)	600	65	83	70
With Emergency Kit (3 hrs.)	600	65	83	70
With Sensor	707	65	83	70

Weight (kg)


Standard	1,1
With Emergency Kit (1 hr.)	1,5
With Emergency Kit (3 hrs.)	2
With Sensor	1,4



Suspension Set

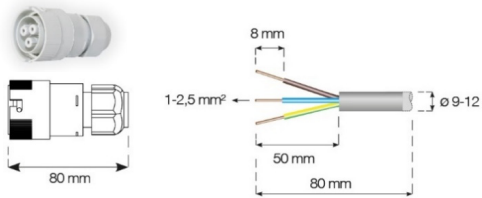

Stainless steel
suspension set



Top View

- EAE, reserves the right to make changes without prior notice.



Revision date: 28.06.2019