



LINA ETANJ V.3

Surface Mounted 23 W Etanj LED Luminaire

Order Code : 3107168
 Product Code : LNE 023U 40OD00 2K9 125 PG V.3



Product Data

Standard Features

Housing	: Aluminium extrusion housing, pg cable gland
Diffuser	: Glare controlled opal diffuser
IP Grade	: IP65
Installation	: Surface mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 22.6 W
Final Luminous Flux	: 2911.8 lm
Efficacy	: 128.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 700 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK09
Led Life Time - L70	: > 72.000 saat @Ta= 40 °C

Photometric Curve

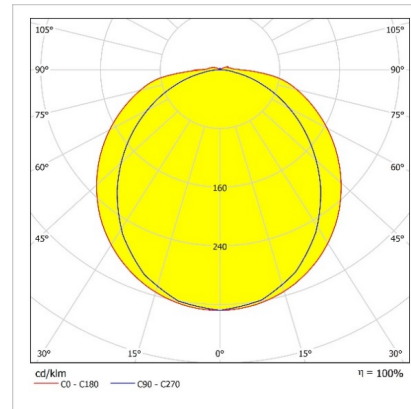


Optional Features

Correlated Color Temperatures	: 3000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Sensor	: Yes

LINA ETANJ V.3

Surface Mounted 23 W Etanj LED Luminaire

3107168 LNE 023U 40OD00 2K9 125 PG V.3

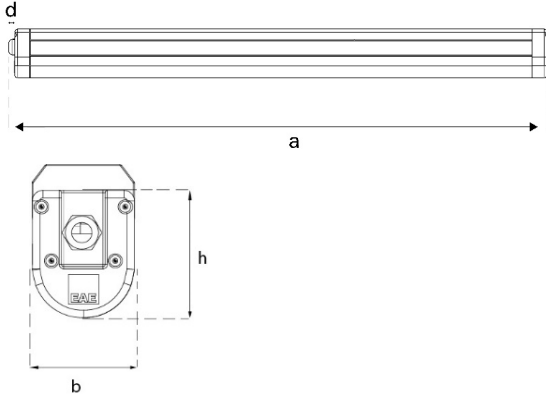


Dimension (mm)


	a	b	h	d
Standard	1265	65	83	15
With Emergency Kit (1 hr.)	1265	65	83	15
With Emergency Kit (3 hrs.)	1265	65	83	15
With Sensor	1372	65	83	15

Weight (kg)


Standard	2,2
With Emergency Kit (1 hr.)	2,7
With Emergency Kit (3 hrs.)	3,1
With Sensor	2,5



Suspension Set



Stainless steel
suspension set



Top View

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 28.06.2019