



LINA ETANJ V.3

Surface Mounted 38 W Etanj LED Luminaire

Order Code : 3107504
 Product Code : LNE 038U 40OD00 4K8 125 PG V.3



Product Data

Standard Features

Housing	: Aluminium extrusion housing, pg cable gland
Diffuser	: Glare controlled opal diffuser
IP Grade	: IP65
Installation	: Surface mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 37.2 W
Final Luminous Flux	: 4828.9 lm
Efficacy	: 129.5 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 900 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK09
Led Life Time - L70	: > 72.000 saat @Ta= 40 °C

Photometric Curve

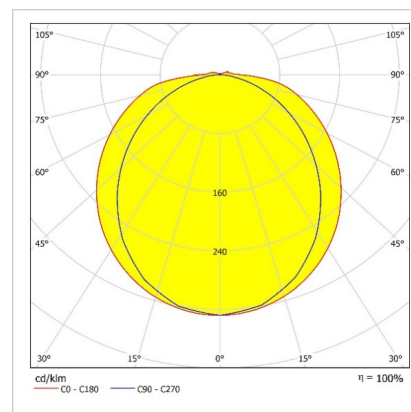


Optional Features

Correlated Color Temperatures	: 3000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Sensor	: Yes

LINA ETANJ V.3

Surface Mounted 38 W Etanj LED Luminaire

3107504 LNE 038U 40OD00 4K8 125 PG V.3

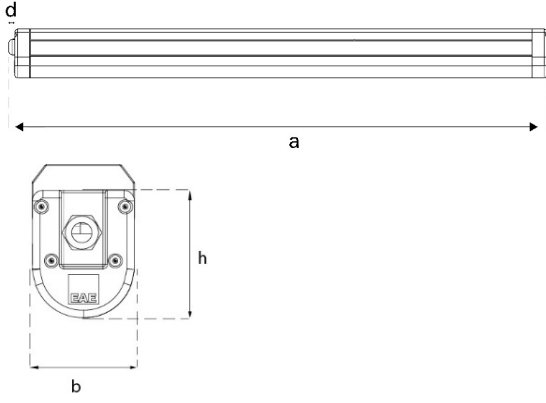

Dimension (mm)

	a	b	h	d
Standard	1265	65	83	15
With Emergency Kit (1 hr.)	1265	65	83	15
With Emergency Kit (3 hrs.)	1265	65	83	15
With Sensor	1372	65	83	15

Weight (kg)

Standard	2,2
With Emergency Kit (1 hr.)	2,7
With Emergency Kit (3 hrs.)	3,1
With Sensor	2,5




PG11 30mm




Standard Cable Dimension 50cm

Suspension Set



Stainless steel
suspension set



Top View

- EAE, reserves the right to make changes without prior notice.



Revision date: 28.06.2019