KRIZA

Surface Mounted 20W Spot LED Luminaire

Order Code	: 3104117
Product Code	: KRZ 020U 40CM00 40 LLL 80

Product Data

Standard Features

Housing	: Aluminium housing
Diffuser	: 40° reflector and glass
IP Grade	: IP 20
Installation	: Surface mounted
Light Source	: COB LED

Optical & Electrical Features

Power Consumption	: 19.9W
Final Luminous Flux	: 2080.1 lm
Efficacy	: 104.5 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Surge Transient Protection	: 1kV
Drive Current	: 500mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+35 °C
Impact Resistance	: IK 02
Led Life Time - L70	: 51.400 hours @Ta= 35 °C

Photometric Curve

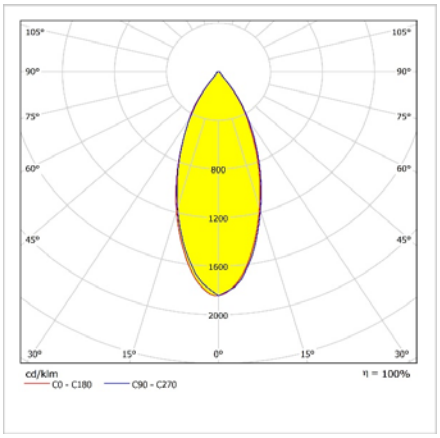

Optional Features

Correlated Color Temperatures	: 3000K
Emergency Kit Options	: No
DALI Option	: No
Degree Options	: 20°, 30°, 55°

KRIZA

Surface Mounted 20W Spot LED Luminaire

3104117 KRZ 020U 40CM00 40 LLL 80

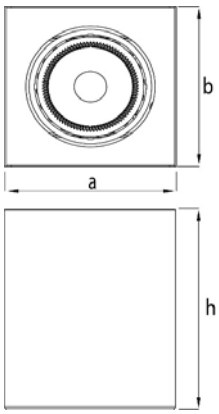

CE

Dimensions (mm)

	a	b	h
Standard	152	152	192

Weight (kg)

Standard	2,2

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 21.06.2017