DIPLED

39 W Ground Recessed Linear Wall Washer LED Lighting Luminaire

Order Code	: 3121704
Product Code	: DIP 039Y 40CM00 AS

Product Data

Standard Features

Housing	: Aluminium extrusion monobloc housing
Diffuser	: Tempered transparent glass
Optic	: Asymmetric lens
IP Grade	: IP67
Installation	: Ground recessed
Light Source	: Power LED

Optical & Electrical Features

Power Consumption	: 39.3 W
Final Luminous Flux	: 1548.4 lm
Efficacy	: 39.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >70

Other Features & Conditions

Operating Temperature Range	: -20 °C/+45 °C
Impact Resistance	: IK10
Led Life Time - L70	: > 50.000 hours @Ta= 45 °C

Photometric Curve

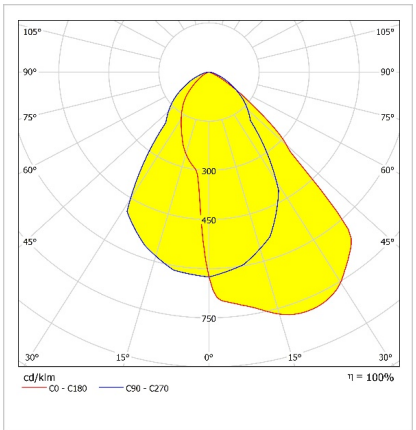

Optional Features

Correlated Color Temperatures	: 3000K, 6500K, Red, Green, Blue, Amber
Angle Options	: 10°, 15°, 30°, 45°

DIPLED

39 W Ground Recessed Linear Wall Washer LED Lighting Luminaire

3121704 DIP 039Y 40CM00 AS

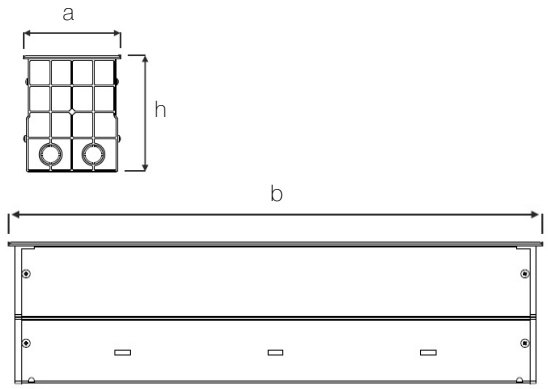

Dimensions (mm)

	a	b	h
Standard	254	68	136

Weight (kg)

Standard	2,7



CE

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 16.02.2018