



COOLED - X

Recessed Mounted 20 W Spot LED Luminaire

Order Code : 3134602
 Product Code : CLD 019A 400A00 2K2 06 20 (METALIK)



Product Data

Standard Features

Housing	: Aluminium enjection housing
Diffuser	: Lens
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: COB LED


Optical & Electrical Features

Power Consumption	: 19.7 W
Final Luminous Flux	: 1990.1 lm
Efficacy	: 100.9 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 500 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+35 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 50.000 hours @Ta= 35 °C

Photometric Curve

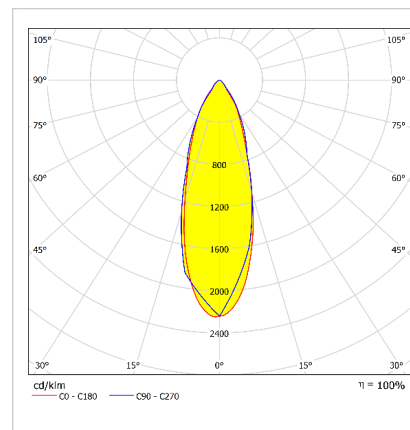

Optional Features

Correlated Color Temperatures	: 3000K, 5700K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes


COOLED - X

Recessed mounted 20 W Spot LED Luminaire

3134602 CLD 019A 400A00 2K2 06 20 (METALİK)

Dimensions (mm)

	Ø	B	Ø D
Standard	180	116	160
With Emergency Kit (1 hr.)	180	116	160
With Emergency Kit (3 hrs.)	180	116	160

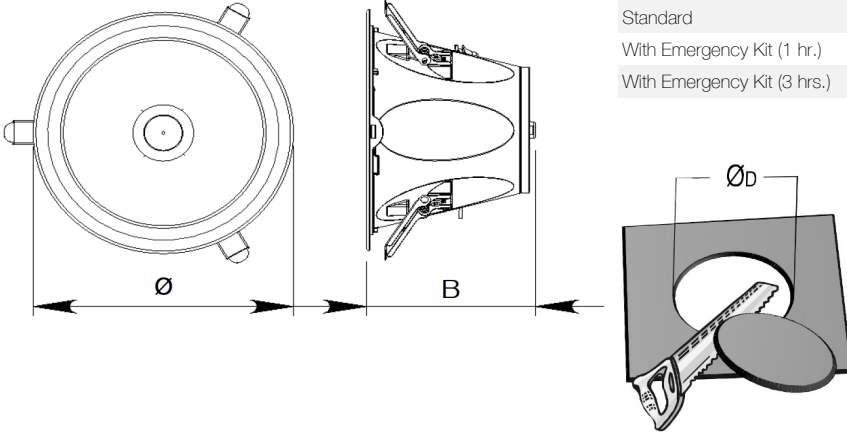

Weight (kg)

Standard	0,3
With Emergency Kit (1 hr.)	1,5
With Emergency Kit (3 hrs.)	1,8

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date : 03.01.2019