COZAR

Surface Mounted 75 W Etanj LED Luminaire

Order Code	: 3135620
Product Code	: COZ 075U 40OD00 8K1 149 PG

Product Data

Standard Features

Housing	: Co-extrusion housing and plastic termination
Optic	: PC diffuser
IP Grade	: IP65
Installation	: Surface mounted
Light Source	: Mid Power LED

Optical & Electrical Features

Power Consumption	: 71.2 W
Final Luminous Flux	: 8037.7 lm
Efficacy	: 112.9 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 475 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Photometric Curve

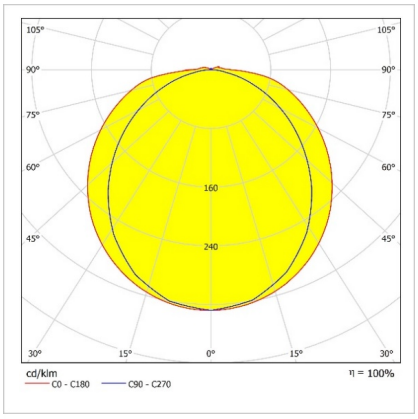

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK09
Led Life Time - L70	: > 60.000 hours @Ta= 40 °C

Optional Features

Correlated Color Temperatures	: 3000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Sensor	: Yes

COZAR

Surface Mounted 75 W Etanj LED Luminaire

3135620 COZ 075U 40OD00 8K1 149 PG

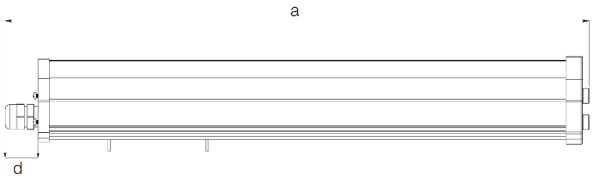



Dimension (mm)

	a	b	h	d
Standard	1466	70	75	26
With Emergency Kit (1 hr.)	1466	70	75	26
With Emergency Kit (3 hrs.)	1466	70	75	26
With Sensor	1575	73	78	26

Weight (kg)

Standard	2,2
With Emergency Kit (1 hr.)	2,7
With Emergency Kit (3 hrs.)	3,2
With Sensor	2,4

Suspension Set

PG11 30mm

Standard Cable Dimension 50cm

Stainless steel suspension set



Top View

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 07.05.2019