



# GIZA

19 W Recessed Mounted Square Spot LED Luminaire

Order Code : 3058169  
 Product Code : EBA 019A 40OD00 1K6 20



## Product Data

### Standard Features

Housing	: RAL 9003 Powder finished housing, PC Case, specially designed cooling
Diffuser	: Opal diffuser and Pc reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Power LED


### Optical & Electrical Features

Power Consumption	: 19.1 W
Final Luminous Flux	: 1637.5 lm
Efficacy	: 85.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 350 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >70

### Other Features & Conditions

Operating Temperature Range	: -20 °C/+30 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+30 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 60.500 hours @Ta= 30 °C

## Photometric Curve

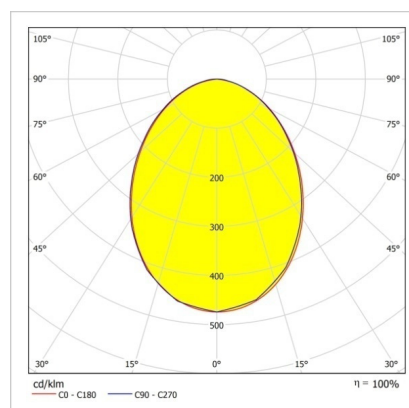


### Optional Features

Correlated Color Temperatures	: 3000K, 5700K
Emergency Kit Options	: 1 hour
DALI Option	: Yes

# GIZA


19 W Recessed Mounted Square Spot LED Luminaire

3058169 EBA 019A 400D00 1K6 20

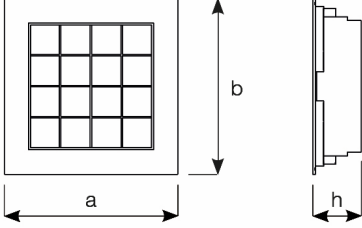

## Dimensions (mm)

	a	b	h	d <sup>1</sup> , d <sup>2</sup>
Standard	240.5	240.5	73	220x220



## Weight (kg)

Standard	3
With Emergency Kit (1 hr.)	3,5

\* ACK: Emergency Kit

- EAE Aydınlatma reserves the right to make any change without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TÜRKİYE Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 26.02.2018