STL mini

13 W Pendant Single Module
Lineer LED Luminaire

Order Code	: 3098511
Product Code	: STL 014S 40OD00 1K2 60TK3I LN2XMN

Product Data

Standard Features

Housing	: RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
IP Grade	: IP40
Installation	: Pendant
Light Source	: Mid Power LED

Optical & Electrical Features

Power Consumption	: 13.1 W
Final Luminous Flux	: 1364 lm
Efficacy	: 103.8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 350 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 60.000 hours @Ta= 40 °C

Photometric Curve

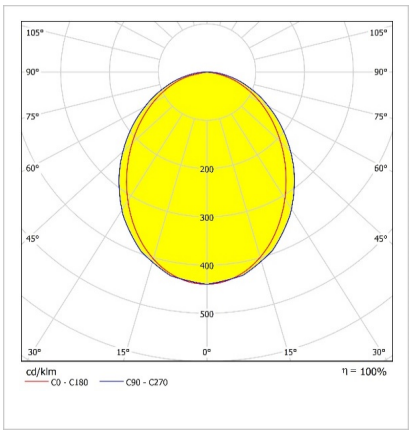

Optional Features

Correlated Color Temperatures	: 2700K, 3000K
Emergency Kit Options	: No
DALI Option	: Yes
Color Option	: RAL 9005

STL mini

13 W Pendant Single Module Lineer LED Luminaire

3098511 STL 014S 40OD00 1K2 60TK3I LN2XMN

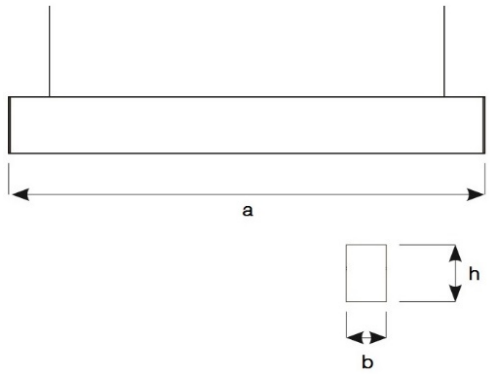

Dimensions (mm)

	a	b	h
Single Module	622	53	87
Starting Module	610	53	87
Finishing Module	610	53	87
Intermediate Module	602	53	87

Weight (kg)

Standard	2,3

Suspension Set



Dimensions (mm)

	a	b	h	Ø
Twin Mounting Set	1m - 2m - 3m	60	1,5	15

Installation System



Single (TK)

Starting (BS) Intermediate (AR) Finishing (SN)

Starting (BS) Finishing (SN)

1

Ordering Code : 3098511
Product Code : STL 014S 40OD00 1K2 60TK3I LN2XMN
Module Model : Single (TK)

2

Ordering Code : 3098512
Product Code : STL 014S 40OD0 60BS3I LN2XMN
Module Model : Starting (BS)

3

Ordering Code : 3098510
Product Code : STL 014S 40OD00 1K2 60AR3I LN2XMN
Module Model : Intermediate (AR)

4

Ordering Code : 3098513
Product Code : STL 014S 40OD0 60SN3I LN2XMN
Module Model : Finishing (SN)

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date : 09.02.2018